



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ :

F02G 03/00

A1

(11) International Publication Number:

WO 92/22741

(43) International Publication Date: 23 December 1992 (23.12.92)

(21) International Application Number: PCT/US92/02758

(22) International Filing Date: 6 April 1992 (06.04.92)

(30) Priority data:

716,541

17 June 1991 (17.06.91)

US

(71) Applicant: ELECTRIC POWER RESEARCH INSTITUTE, INC. [US/US]; 3412 Hillview Avenue, Palo Alto, CA 94303 (US).

(72) Inventors: COHN, Arthur ; 816 Mesa Avenue, Palo Alto, CA 94306 (US). MINDERMAN, David, J. ; 25901 Rustic Lane, Westlake, OH 44145 (US).

(74) Agents: GALLIANI, William, S. et al.; Flehr, Hohbach, Test, Albritton & Herbert, 4 Embarcadero Center, Suite 3400, San Francisco, CA 94111-4187 (US).

(81) Designated States: AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), MC (European patent), NL (European patent), SE (European patent).


Published

With international search report.

(54) Title: POWER PLANT UTILIZING COMPRESSED AIR ENERGY STORAGE AND SATURATION

(57) Abstract

An improved power plant employing a combination of compressed air storage and saturation (simultaneous heating and humidification) of compressed air is disclosed. The power plant (20A) includes a combustor (26) which provides hot gas for driving a turbine (24). The turbine (24) is used in conjunction with a generator (34) to generate electrical power. The power from the turbine (24) is accessible by a compressor system (40) during low power demand periods. The compressor system (40) is used to compress air which is stored in an air storage chamber (52). The compressed air from the air storage chamber (52) is used by the combustor (26) during high power demand periods, while the compressor system (40) is shut down, to provide compressed combustion gas to the turbine (24). To enhance the efficiency of the plant, while further lowering the capital cost of the plant, a saturator (60) is positioned between the storage chamber (52) and the combustor (26). The saturator (60) receives compressed air from the storage chamber (52) and simultaneously heats and humidifies it. The resultant heated and humidified compressed air is then conveyed to the combustor (26), typically after further heating by a recuperator (70).

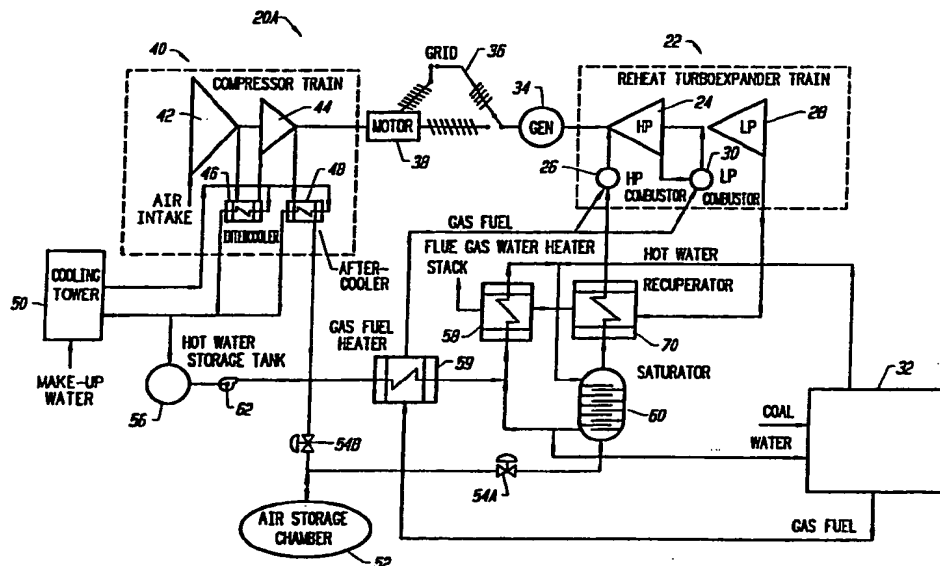

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FI	Finland	MI	Mali
AU	Australia	FR	France	MN	Mongolia
BB	Barbados	GA	Gabon	MR	Mauritania
BE	Belgium	GB	United Kingdom	MW	Malawi
BF	Burkina Faso	GN	Guinea	NL	Netherlands
BG	Bulgaria	GR	Greece	NO	Norway
BJ	Benin	HU	Hungary	PL	Poland
BR	Brazil	IE	Ireland	RO	Romania
CA	Canada	IT	Italy	RU	Russian Federation
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark	MG	Madagascar		
ES	Spain				

**POWER PLANT UTILIZING COMPRESSED AIR ENERGY
STORAGE AND SATURATION**

Brief Description of the Invention

This invention relates generally to an improved power plant. More particularly, this invention relates to a method and apparatus for enhancing the operation of a power plant by utilizing a combination of compressed air energy storage and saturation (simultaneous heating and humidification) of compressed air with water vapor.

Background of the Invention

The power output demand on a power plant grid system varies greatly during the course of a day or week. During intermediate and high demand periods, typically between 7:00 a.m. and 11:00 p.m. on weekdays, the value of electric power is comparatively high. In contrast, during the low demand periods, typically on weekends and between 11:00 p.m. and 7:00 a.m. on weekdays, the value is relatively low. Thus, for the low demand periods, it would be highly advantageous to find an efficacious way to (1) store the mechanical, thermal, and/or electrical output of an individual power plant, or (2) store the electrical output produced by other power plants on the grid. The stored power could then be economically used during high demand periods.

One approach to storing power generated during low demand periods involves the operation of compressors during these periods. The compressors produce compressed air which possesses mechanical and thermal energy which can be stored. The compressed air from storage may be utilized by the power plant at a later time while the compressors are shut down. While this approach realizes certain benefits, there are still some deficiencies associated with it.

First, the capital cost and operating costs of compressors are high. Another issue relates to the

practical requirement of cooling the compressed air before storage and then heating the compressed air after it is removed from storage. This heating is generally accomplished through recuperation and combustion of a carbonaceous fuel, which is expensive and results in the emission of pollutants. Prior art compressed air storage plants, even those with recuperators, do not utilize the exhaust thermal energy as efficiently as possible. The amount of carbonaceous fuel consumption, and hence emissions, can be reduced through a more efficient use of exhaust thermal energy generated in the power plant.

These problems associated with compressed air storage have precluded the use of compressed air storage in fuel processing power plants (i.e., power plants with a major fuel processing system, such as a coal gasification power plant). There are a number of problems associated with fuel processing power plants which could be solved through proper utilization of a compressed air energy storage facility. One problem associated with fuel processing power plants relates to the high capital cost associated with fuel processing equipment. It would be advantageous to eliminate the fuel processing equipment associated with providing power to the compressor during high demand periods. Another issue with fuel processing power plants relates to altering the power output during the course of a day to address high demand and low demand periods. It would be advantageous to operate such a power plant such that it approaches a steady state condition.

30 Objects and Summary of the Invention

Thus it is a general object of the present invention to provide an apparatus and method for utilizing the combination of compressed air energy storage and air saturation in a power plant.

35 It is a related object of the present invention to incorporate a compressed air energy storage feature in fuel

processing power plants in order to reduce their specific cost and improve their operating flexibility.

It is another related object of the present invention to more efficiently utilize compressed air energy storage designs by incorporating a saturator.

It is another object of the present invention to utilize the combination of compressed air energy storage and air saturation to reduce the capital and generation costs of power plants.

It is yet another object of the present invention to provide a power plant which operates in a more balanced manner throughout high demand and low demand periods.

It is another object of the present invention to realize high power output without an increase in the combustion of carbonaceous fuels.

It is a related object of the present invention to provide a power plant which reduces the emission of pollutants.

It is yet another object of the present invention to provide a power plant which efficiently recycles exhaust thermal energy and all other available thermal energies.

It is another object of the present invention to provide a power plant with a saturator which uses thermal energy from a number of sources.

It is another object of the present invention to provide a power plant with less compressor mass flow for a given power output.

These and other objects are obtained by a method and apparatus for producing power in accordance with the present invention. The power plant includes a combustor which provides hot gases for driving a turbine. The turbine is used in conjunction with a generator to generate electrical power. The power from the turbine is accessible by a compressor system, typically utilized during low power demand periods. The compressor system is used to compress air some of which is stored in an air storage chamber. The compressed air from the air storage chamber is used by the

combustor during high power demand periods to provide compressed combustion gas to the turbine. To enhance the efficiency of the plant, while further lowering the capital cost of the plant, a saturator is positioned between the storage chamber and the combustor. The saturator receives compressed air from the storage chamber and simultaneously heats and humidifies it. The resultant heated and humidified compressed air is then conveyed to the combustor, typically after further heating by a recuperator.

10

Brief Description of the Drawings

Other objects and advantages of the invention will become apparent upon reading the following detailed description and upon reference to the drawings, in which:

15 Figure 1 is a fuel processing power plant in accordance with the prior art.

Figure 2 is a compressed air energy storage power plant in accordance with the prior art.

20 Figure 3 is one embodiment of an improved power plant in accordance with the present invention.

Figure 4 is a detailed embodiment of the power plant of Figure 3.

Figure 5 is an alternate embodiment of an improved power plant in accordance with the present invention.

25

Detailed Description of the Invention

Turning now to the drawings, wherein like components are designated by like reference numerals in the various figures, attention is initially directed to Figure 1.

30 Figure 1 depicts a power plant 20 in accordance with the prior art. More particularly, Figure 1 depicts a power plant with a fuel processing system. In accordance with the prior art, the power plant 20 includes a turbine assembly 22 with a high pressure turbine 24 and a high pressure combustor 26. The turbine assembly 22 may also include a low pressure turbine 28 and a low pressure combustor 30. The combustors 26, 30 are fed by a fuel

processing system 32, for instance, a coal gasification system.

The turbine assembly drives a generator 34. In turn, the generator 34 is coupled to grid 36 and shaft 37. Shaft 37 continuously drives a compressor system 40. Compressor system 40 includes a low pressure compressor 42 and a high pressure compressor 44. Preferably, low pressure compressor 42 is coupled to an intercooler 46 to remove some of the thermal energy of compression. The continuous output of high pressure compressor 44 is preferably coupled to aftercooler 48 which removes additional thermal energy from the resultant continuous compressed air stream. In accordance with prior art techniques, the resultant compressed air stream, flowing continuously and directly from the compressor system, may be conveyed to a saturator 60 and recuperator 70 before being fed to combustor 26. It should be noted that the saturator 60 is more effective if used in conjunction with aftercooler 48. The overall benefit of the saturator is marginal in the prior art because the aftercooler 48 removes thermal energy from the compressed air stream exiting the compressor system 40.

Turning to Figure 2, a compressed air energy storage (CAES) power plant 21, in accordance with the prior art, is depicted. During low power demand periods, energy may be drawn from the grid 36. This energy may be utilized by motor 38 to drive the compressor system 40.

The compressed air stream produced by compressor system 40 contains mechanical and thermal energy. The stream is processed through aftercooler 48, which withdraws most of its thermal energy. This is required so that the air will be cold enough to be compatible with a practical air storage chamber. The cold air stream is conveyed to air storage chamber 52. Thus, the air storage chamber 52 serves to store the mechanical energy of the compressed air. This energy may be utilized when the compressor system 40 is shut down at times of high power demand. The energy may be utilized in conjunction with the fuel fed to the turbine

assembly 22. Specifically, the compressed air from storage chamber 52 is conveyed to combustor 26 through the appropriate configuration of the valves 54, as is known in the art.

5 In accordance with the present invention, the prior art power plants of Figures 1 and 2 are enhanced by utilizing a combination of air storage and saturation. More particularly, the fuel processing power plant of Figure 1 is modified to include an air storage chamber, in addition
10 to other complementary elements, and the CAES power plant of Figure 2 is modified to include a saturator, in addition to other complementary elements.

The combination air storage and saturation power plant of the present invention yields a number of advantages.
15 As to be more fully described herein, this configuration, in conjunction with fuel processing equipment, enables a balanced and continuous operation of a power plant while meeting variable power demands. In addition, the apparatus and method of the present invention more fully exploits
20 thermal energy sources of the power plant. This allows smaller fuel processing equipment and compressors; thus, the capital costs of the power plant may be reduced.

By conveying the pressurized air stream from the air storage chamber to the saturator, the turbine assembly of
25 the present invention receives a heated and humidified air stream with a greater mass flow and greater thermal energy. The higher mass flow and higher thermal energy provided by the saturator reduce the amount of energy needed for compression and thus the fuel required to provide the
30 compression. Thus, the teaching of the present invention reduces fuel consumption and the emissions which result from fuel consumption.

Having disclosed the general concept and advantages of the present invention, attention turns to Figure 3 which
35 depicts a specific embodiment of an enhanced fuel processing power plant 20A, in accordance with the present invention.

As to be more fully described herein, the fuel processing power plant 20A of the present invention contains a combination of air storage, fuel processing, and saturation. As used herein, the term saturation refers to
5 the simultaneous heating and humidification of air.

The power plant 20A includes a turbine assembly 22 which may run continuously. During low-demand time periods, the turbine assembly 22 may produce more power than is required by grid 36. In these periods, some or all of the
10 power of the turbine assembly 22 is applied to motor 38 rather than to grid 36. Motor 38 drives a compressor system 40. The thermal energy of the compressed air is removed by heating water in the intercooler 46 and aftercooler 48. Some of the heated water from the intercooler 46 and
15 aftercooler 48 is conveyed to hot water storage tank 56. Cooling tower 50 may also be provided to cool some of the water for reuse in intercooler 46 and aftercooler 48.

Some of the compressed air stream produced by compressor system 40 is conveyed through open valve 54B to
20 air storage chamber 52, while the remainder goes directly to the saturator 60 through open valve 54A. The compressor system 40 is preferably sized to compress more air per unit time, while it is on, compared to that which is consumed per unit time by the turbine assembly 22. Over the full
25 cycle of a day or week, the air storage charging and withdrawal are in balance. Thus, the air storage chamber 52 serves to store the mechanical energy of the compressed air (and the small amount of thermal energy not removed by aftercooler 48), while the hot water tank 56 stores much
30 of the thermal energy of compression. These sources of energy may now be profitably utilized in accordance with the current invention. Most significantly, the mechanical energy within the air storage chamber 52 may be utilized at time periods of high power demand in conjunction with
35 the fuel fed to the turbine assembly 22.

To improve the capital cost and overall heat rate of power plant 20A, in accordance with the invention, the air

storage chamber 52 is coupled to a saturator 60. Specifically, the cold, compressed air from air storage chamber 52 is conveyed through open valve 54A to saturator 60, where it is converted to a heated and humidified compressed air stream. Preferably, the heated and humidified compressed air stream is then conveyed to the recuperator 70, where it is further heated. The resultant heated and humidified compressed air stream is then conveyed to the high pressure combustor 26 of gas turbine assembly 22, as is known in the art.

The saturator 60 is of the type which is known in the art. In accordance with the invention, the saturator 60 receives hot water from a number of sources. First, the saturator 60 receives hot water from fuel processing system 32. In this embodiment of the invention, the fuel processing system's thermal energy is transferred to water rather than steam. The pressurized hot water produced by the fuel processing system is fed to the saturator 60 where it is used to heat and humidify the pressurized air stream.

The saturator 60 is also preferably fed by hot water from the storage tank 56. The pressurized hot water storage tank 56 accumulates pressurized hot water during operation of the compressor system 40. The water from the hot water storage tank 56 is used to heat the fuel and then is combined with some of the drain flow from the saturator 60 and fed to flue-gas water heater 58, where it is further heated by the exhaust thermal energy from turbine assembly 22.

Thus, the saturator of the present invention effectively utilizes exhaust thermal energy from the fuel processing system 32, compressor system 40, and turbine assembly 22, and in so doing, it improves the plant efficiency.

By conveying the pressurized air stream from the air storage chamber 52 to the saturator 60, the turbine assembly 22 receives a heated and humidified air stream with a greater mass flow and thermal energy. As a result of this

increased mass flow, the amount of air required by compressor system 40 is reduced. Consequently, smaller compressors may be used, and less power will be consumed while driving the compressors. The higher thermal energy of the compressed air stream provides more efficient operation of the power plant. The teaching of the present invention reduces fuel consumption and the pollutants which result from fuel consumption. Moreover, it enables use of a smaller and lower capital cost fuel processing system.

10 The fuel processing system 32, for instance coal gasification, typically has large thermal flows (usually originating from cooling the fuel prior to its clean-up process). A further advantage of the invention is that it makes better use of this thermal energy in the form of hot

15 water. Since hot water is used, rather than steam, the capital cost of the fuel processing power plant is reduced.

Hot water preferably enters saturator 60 at the top, while the tepid water is mainly removed from the bottom of the saturator 60, where it is returned to flue-gas water

20 heater 58 and reheated. Some of the water leaving the saturator 60 at various locations is recirculated to the fuel processing system 32 for cooling purposes.

Preferably, the air which leaves the saturator 60 is conveyed through a recuperator 70 in which the heated and

25 humidified pressurized air stream is further heated before it is fed to combustor 26 of the turbine assembly 22. Recuperator 70 receives thermal energy from the exhaust gas of turbine assembly 22. The remaining thermal energy of the exhaust gas is conveyed to flue-gas water heater 58.

30 The operation of the power plant 20A of Figure 3 has been described in a continuous mode. In the continuous mode, the fuel processing system 32, the turbine assembly 22, and the saturator 60 are always operating. During low demand periods, the power from the generator 34 is used to

35 drive the compressor system 40. During high demand periods, the compressor system 40 is shut down, and the generator power goes to the grid 36, thus meeting the variable power

demands. In the continuous mode, a balanced power plant, heretofore unknown in the art, is realizable. The compressor system 40 is sized so that its power demand is equal to the turbine assembly 22 output. The compressor
5 system 40 is turned on for just enough duration during the low demand periods in the daily or weekly cycle to provide all of the compressed air required to continuously operate the turbine assembly 22.

Other modes of operation are possible as well. For
10 instance, during the low demand periods, if the compressor system 40 mass flow rate and on-time period is configured so that the generator system does not have enough power to run the compressor system 40 by itself, additional power can be drawn from the grid 36. If, during the low demand
15 time periods, there is an extremely cheap or low polluting source of power available from the grid 36, it may be preferable to shut down the turbine assembly 22 and use the power from the grid 36 for the motor 38.

Proper electrical connections between the generator
20 34, the grid 36, and the motor 38, are realized through standard switching techniques. Instead of electrical connections between motor 38 and generator 34, a single motor-generator may be used, connected to the compressor system 40 and turbine system 22 by mechanical clutches.

25 Turning to Figure 4, a more detailed description of an embodiment of the present invention is provided. The power plant 20AA of Figure 4 is conceptually identical to the power plant of Figure 3; like components are designated by like reference numerals. The primary differences between
30 the two embodiments are described herein.

First, the compressor system 40A includes low pressure compressor 42A, intermediate compressors 42B, 42C and a high pressure compressors 44A. A number of intercoolers 46A, 46B, and 46C are preferably provided.

35 Another difference between the two embodiments relates to the details disclosed in relation to a fuel processing system 32. Fuel processing system 32 is a gasification

system of the type known in the art; it may include a hydrolysis reactor 102 coupled to a reactor feed preheater 104. The gasification system 32 may also include a high pressure steam generator 106 and a low pressure steam generator 110. The gasification system 32 may also include a number of air saturator/water heaters 108A, 108B, and 108C. Vapor liquid separators 112A and 112B are also utilized in accordance with prior art techniques.

An important aspect of the embodiment of Figure 4 is the utilization of a number of saturators 60A, 60B, 60C, 60D, and 60E. Saturator 60D receives hot water directly from gasification system 32 through a mixer 63. Saturators 60C, 60B, and 60A receive hot water through splitters 61C, 61B, and 61A. Saturator 60E receives hot water directly from water heater 68.

Preferable temperatures (T), pressures (P), and mass flows (M) are indicated in Figure 4. Temperatures are in Fahrenheit, pressures are in pounds per square inch, and mass flows are in pounds per second.

Turning now to Figure 5, an alternate embodiment of the present invention with a combination of compressed air storage and saturation is disclosed. More particularly, the method and apparatus of the present invention is applied to a CAES power plant 21A. In accordance with the present invention, the efficiency of the compressed-air energy storage plant of the prior art is enhanced by utilizing a saturator 60 between the air storage chamber 52 and the recuperator 70. In contrast to the prior art, the use of a saturator 60 in the present invention is highly effective since in the prior art the aftercooler 48 was already necessary to remove most of the thermal energy of compression for practical air storage compatibility.

Specifically, with the present invention, during periods of high demand, the cold compressed air from the air storage chamber 52 is conveyed to a saturator 60 where it is converted to a heated and humidified compressed air stream. The heated and saturated compressed air stream is

then conveyed to the recuperator 70 for further heating and then to a combustor of the turbine assembly 22. The hot water for the saturator 60 comes from the storage tank 56 and the return flow of the saturator 60 after further heating in the flue-gas water heater 58.

By conveying the pressurized air stream from the air storage chamber 52 to the saturator 60, the turbine assembly 22 of the present invention receives a heated and humidified air stream with greater mass flow and greater thermal energy than is obtained in prior art compressed-air energy storage plants. As a result of this greater mass flow, the amount of compression required by the compressor system 40 may be reduced. Consequently, smaller compressors may be used, and less power will be consumed while driving the compressors. Thus, less energy is required to be drawn from the grid 36 in order to drive the compressor system 40. In usual American practice, the grid power is derived from burning fossil fuel, so the overall fossil fuel consumption would be reduced by the invention. Consequently, the teaching of the present invention also reduces the pollutants which result from fossil fuel consumption. Moreover, it enables use of a smaller and less costly compression system.

The combustor 26 is fed by ordinary premium fuel (e.g., distillate, natural gas) and humid, heated, high pressure air from recuperator 70. The recuperator 70 draws humidified, heated, high pressure air from the saturator 60. The saturator 60 draws cold, dry, high pressure air from the air-storage chamber 52. The turbine assembly 22 is coupled to a generator 34 which provides power to grid 36 during high demand periods.

During low demand periods, power from grid 36 may be used by motor 38 to drive compressor system 40. The cooled, compressed air produced by the compressor system 40 is conveyed to air cavity 52. In accordance with prior art techniques, the compressed air may be utilized by turbine assembly 22 at a later time. However, to enhance this

subsequent use, in accordance with the invention, a saturator 60 is utilized to heat and humidify the air which leaves the air cavity 52. In one embodiment, this heated and humidified air may then be conveyed to the high pressure combustor of the turbine assembly 22. The recuperator 70 may be incorporated between the saturator 60 and the combustor 26 for improved efficiency of operation. As previously indicated, this results in a number of benefits.

The saturator 60 is of the type which is known in the art. In accordance with the invention, the saturator 60 receives thermal energy from a flue gas water heater 58 which obtains thermal energy from a number of sources.

The flue gas water heater 58 is fed by hot water storage tank 56. As previously discussed, the hot water storage tank 56 accumulates thermal energy during operation of the compressor system 40. The water from the hot water storage tank 56 is fed to flue gas water heater 58, where it is combined with tepid water draining from the saturator 60. The thermal energy source for the flue-gas water heater 58 is obtained from the exhaust thermal energy of gas turbine assembly 22. Thus, the saturator 60 of the present invention efficiently utilizes exhaust thermal energy from the compressor system 40 and from the turbine assembly 22.

Other configurations for feeding the various hot water flows to the saturator are also feasible.

During the high demand time period, pump 62 operates, and the flue-gas water heater 58 receives hot water from hot water storage tank 56. The hot water from the hot water storage tank 56 may be conveyed through gas fuel heater 59. The saturator 60 receives the pressurized air from air storage chamber 52, as the saturator valve 54A is open, and the compressor valve 54B is closed. Hot water preferably enters saturator 60 at the top, while the tepid water is removed from the bottom of the saturator 60, where it is returned to flue-gas water heater 58 and reheated.

The air which leaves the saturator 60 may be conveyed through a recuperator 70 which further heats the pressurized

air stream before it is fed to combustor 26 of the turbine assembly 22. Recuperator 70 receives exhaust gas from turbine assembly 22. The remainder of the thermal energy of the exhaust gas is conveyed to flue gas water heater 58.

- 5 Conversely, during low demand periods, the air storage chamber 52 receives pressurized air, while compressor valve 54B is open, and saturator valve 54A is closed.

One skilled in the art will recognize that many alternate embodiments of the present invention are feasible.

- 10 The fuel processing system 32 of Figure 3 need not be a coal gasification system. Other fuel processing techniques such as integrated liquefaction and the gasification of other fuels are also feasible, for instance, gasification of heavy oil, coke, oil shale, or tar. In addition, the combustors
15 and fuel processor elements do not have to be discrete elements; rather, they can be integrated into a single system, such as a fluidized bed, as is known in the art. Also, the combustors may be replaced by externally heated or fired heat exchangers, as is known in the art.

- 20 The foregoing descriptions of specific embodiments of the present invention have been presented for purposes of illustration and description. They are not intended to be exhaustive or to limit the invention to the precise forms disclosed, and obviously many modifications and variations
25 are possible in light of the above teaching. The embodiments were chosen and described in order to best explain the principles of the invention and its practical application, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various
30 modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the Claims appended hereto and their equivalents.

IN THE CLAIMS:

1. An apparatus for producing power comprising:
 - means for compressing air;
 - 5 means for storing the compressed air, said storing means being coupled to said compressing means;
 - means for heating and humidifying the compressed air, said means being coupled to said storing means; and
 - means for utilizing the heated and humidified air to
 - 10 drive a generator.
2. The apparatus of claim 1 wherein said compressing means includes a plurality of compressors.
- 15 3. The apparatus of claim 2 wherein said compressing means further includes a compressor system, said compressor system including:
 - a plurality of compressors;
 - a plurality of intercoolers, one of said intercoolers
 - 20 coupled between each of said compressors;
 - an aftercooler positioned at the output of the last compressor; and
 - a hot water storage tank coupled to said intercoolers and said aftercooler.
- 25 4. The apparatus of claim 3 wherein said compressors are coupled to a motor.
5. The apparatus of claim 3 wherein said compressors are
- 30 coupled to a shaft.
6. The apparatus of claim 1 wherein said storing means includes an underground air storage chamber.
- 35 7. The apparatus of claim 1 wherein said heating and humidifying means includes a saturator, said saturator being

-16-

coupled to a thermal energy source for delivering hot water to said saturator.

8. The apparatus of claim 7 wherein said saturator is coupled to a recuperator, said recuperator serving to heat the output of said saturator.

9. The apparatus of claim 7 wherein said thermal energy source includes hot water obtained from a fuel processing system.

10. The apparatus of claim 9 wherein said fuel processing system is a fuel gasification system.

11. The apparatus of claim 9 wherein said fuel processing system is a fuel liquefaction system.

12. The apparatus of claim 9 wherein said thermal energy source further includes a flue gas water heater.

13. The apparatus of claim 12 wherein said flue gas water heater receives hot water from a hot water storage tank.

14. The apparatus of claim 1 wherein said utilizing means includes a turbine assembly.

15. The apparatus of claim 14 wherein said utilizing means includes a combustor to drive said turbine assembly.

16. The apparatus of claim 14 wherein said utilizing means includes an externally fired heat exchanger to drive said turbine assembly.

17. An apparatus for producing power comprising:
a turbine;
a generator coupled to said turbine, said generator providing energy to a grid;

-17-

a combustor coupled to said turbine;
a saturator coupled to said combustor, said saturator delivering humidified and heated air to said combustor;
an air storage chamber coupled to said saturator, said
5 chamber storing compressed air;
a compressor system coupled to said grid for compressing air and delivering the compressed air to said storage chamber.

10 18. The apparatus of claim 17 further including a recuperator positioned between said saturator and said combustor for further heating the heated and humidified air leaving said saturator.

15 19. The apparatus of claim 17 further including
a fuel gasification system coupled to said combustor to provide fuel for said combustor, said fuel gasification system further coupled to said saturator to provide hot water to said saturator; and

20 a flue gas water heater coupled to said saturator to provide hot water to said saturator, said water heater receiving the exhaust from said turbine.

20. The apparatus of claim 17 wherein said compressor
25 system includes a plurality of compressors driven by a motor coupled to said grid.

21. In a compressed air energy storage plant including a combustor which is coupled to a turbine which drives a
30 generator to deliver energy to a grid, a motor receiving power from said grid, the motor being used to drive compressors to compress air which is stored in a storage chamber, and the compressed air from the storage chamber being used by the combustor, the improvement comprising:

35 a saturator positioned between said storage chamber and said combustor to receive compressed air from said

storage chamber and to heat and humidify the compressed air before it is conveyed to said combustor.

22. The apparatus of claim 21 wherein said saturator
5 utilizes water from a flue gas water heater.

23. The apparatus of claim 22 wherein said flue gas water
heater receives hot water from a hot water storage tank
which utilizes the thermal energy from said compressor
10 system.

24. The apparatus of claim 22 wherein said flue gas water
heater receives exhaust thermal energy from said turbine
assembly.

15 25. The apparatus of claim 21 wherein a recuperator is
positioned between said saturator and said combustor.

26. The apparatus of claim 25 wherein said recuperator
20 utilizes exhaust thermal energy from said turbine assembly.

27. A method of producing power comprising the steps of:
compressing air;
storing the compressed air;
25 heating and humidifying the compressed air; and
utilizing the heated and humidified air to drive a
generator.

28. The method of claim 27 wherein said utilizing step is
30 employed during peak power demand periods.

29. The method of claim 27 wherein said compressing step
is employed during low power demand periods.

35 30. The method of claim 27 wherein said utilizing step is
continuously employed.

31. The method of claim 27 wherein said compressing step is continuously employed.
32. The method of claim 27 wherein said utilizing step is
5 intermittently employed.
33. The method of claim 27 wherein said utilizing and compressing steps are utilized in a balanced manner.
- 10 34. The method of claim 27 further comprising the step of utilizing the fuel and thermal energy flows of fuel processing equipment during said utilizing step and said heating and humidifying step.

1/5

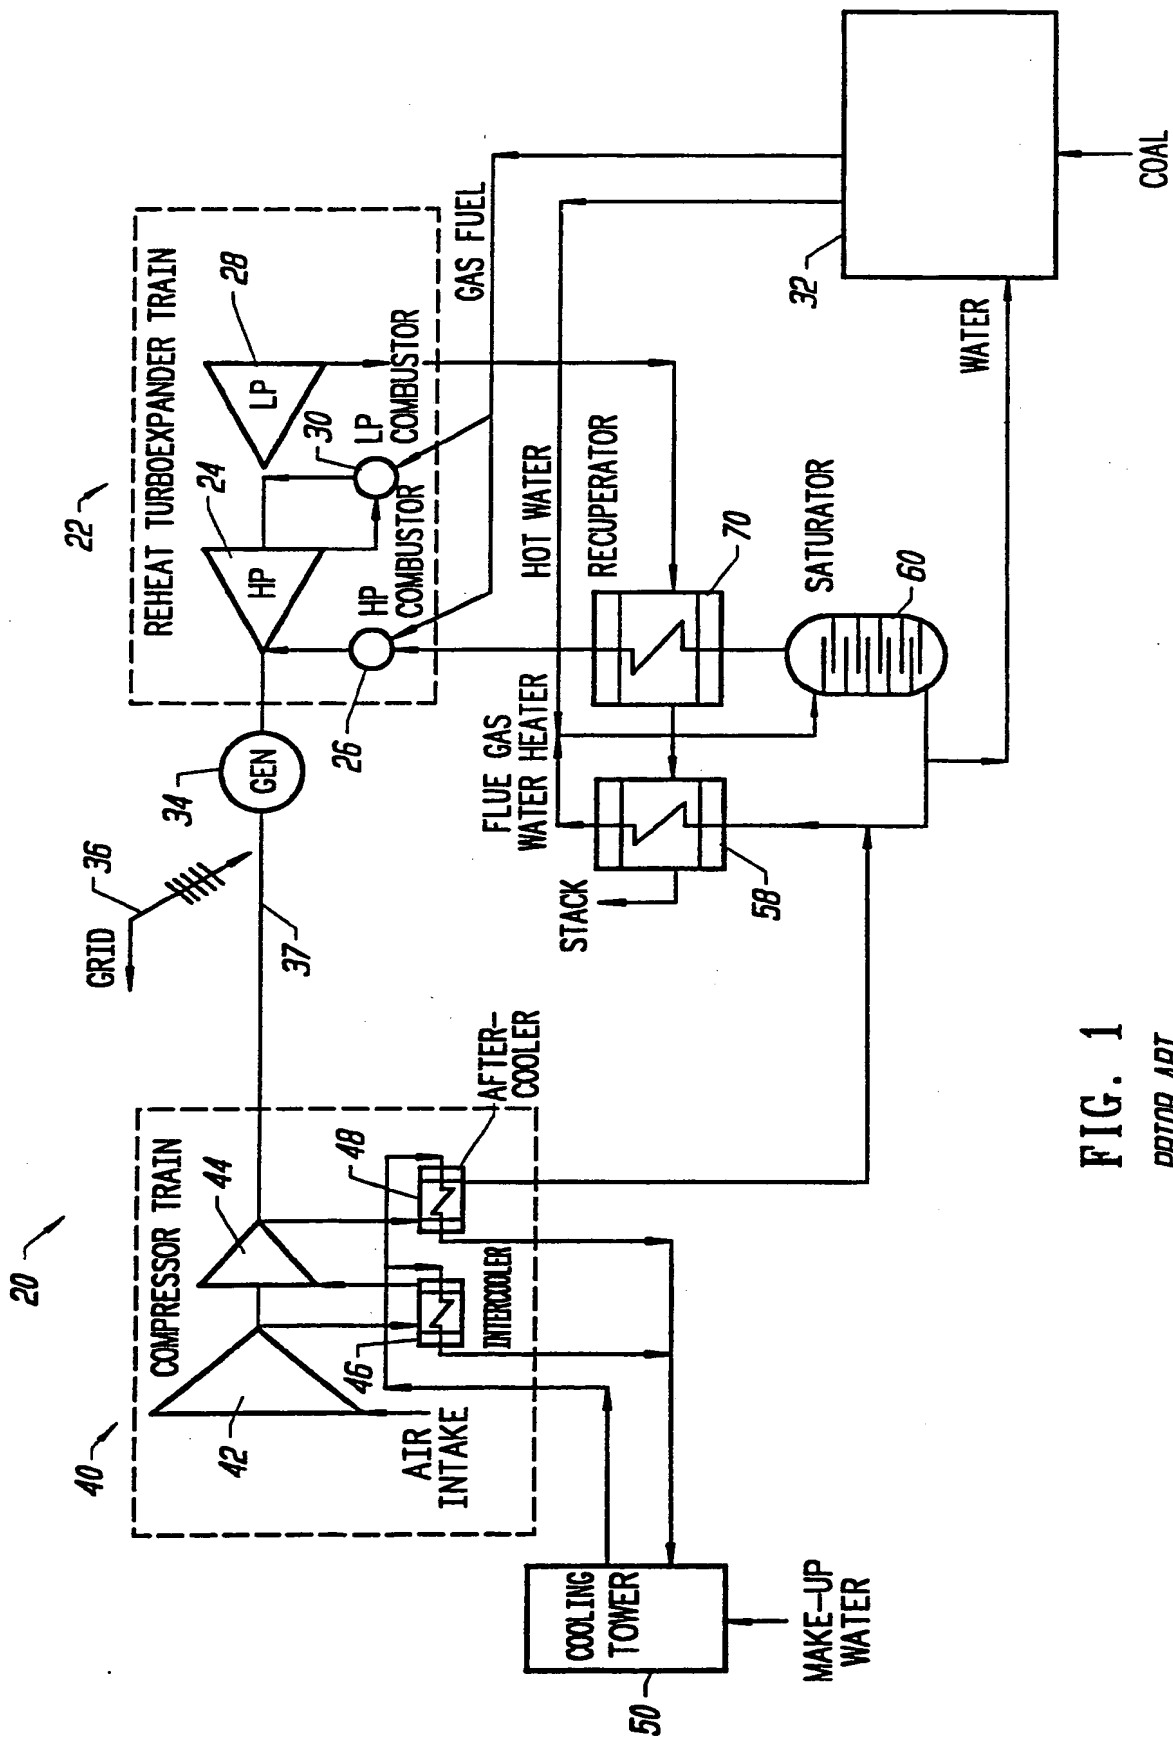


FIG. 1
PRIOR ART

2/5

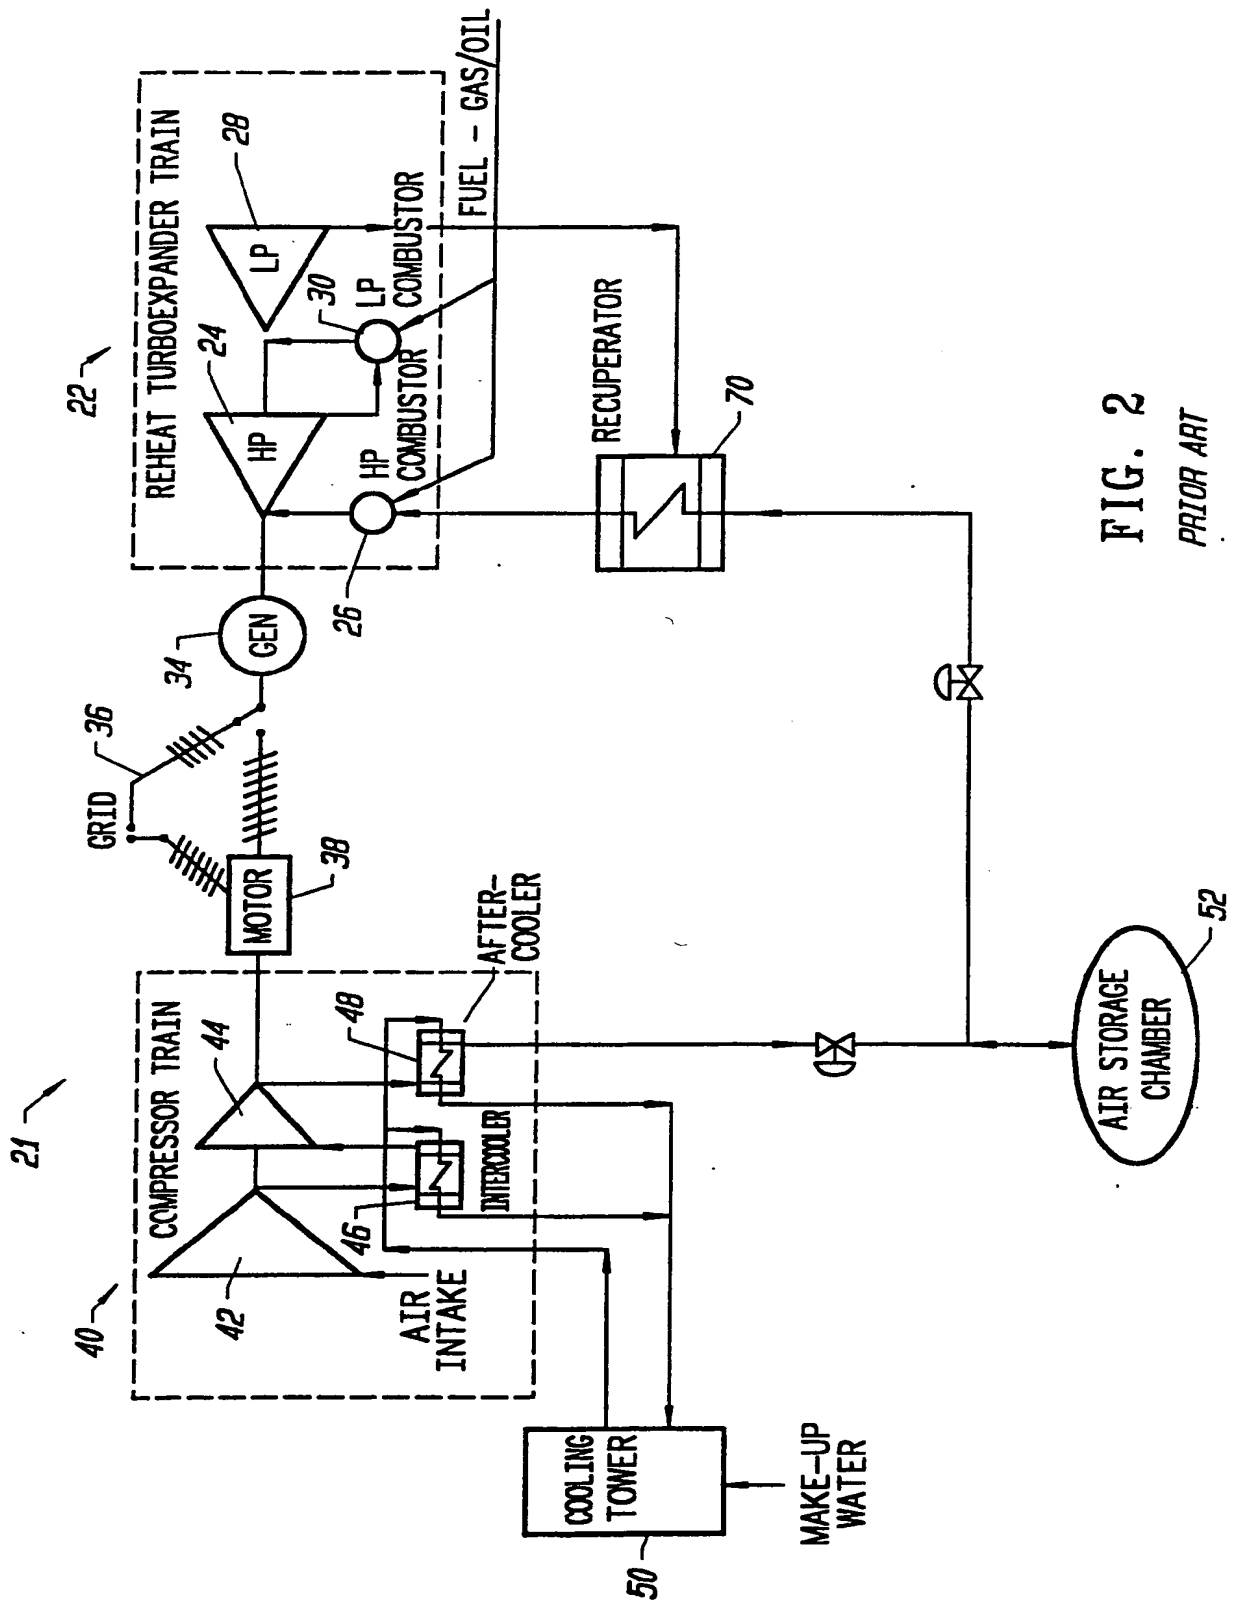


FIG. 2
PRIOR ART

3/5

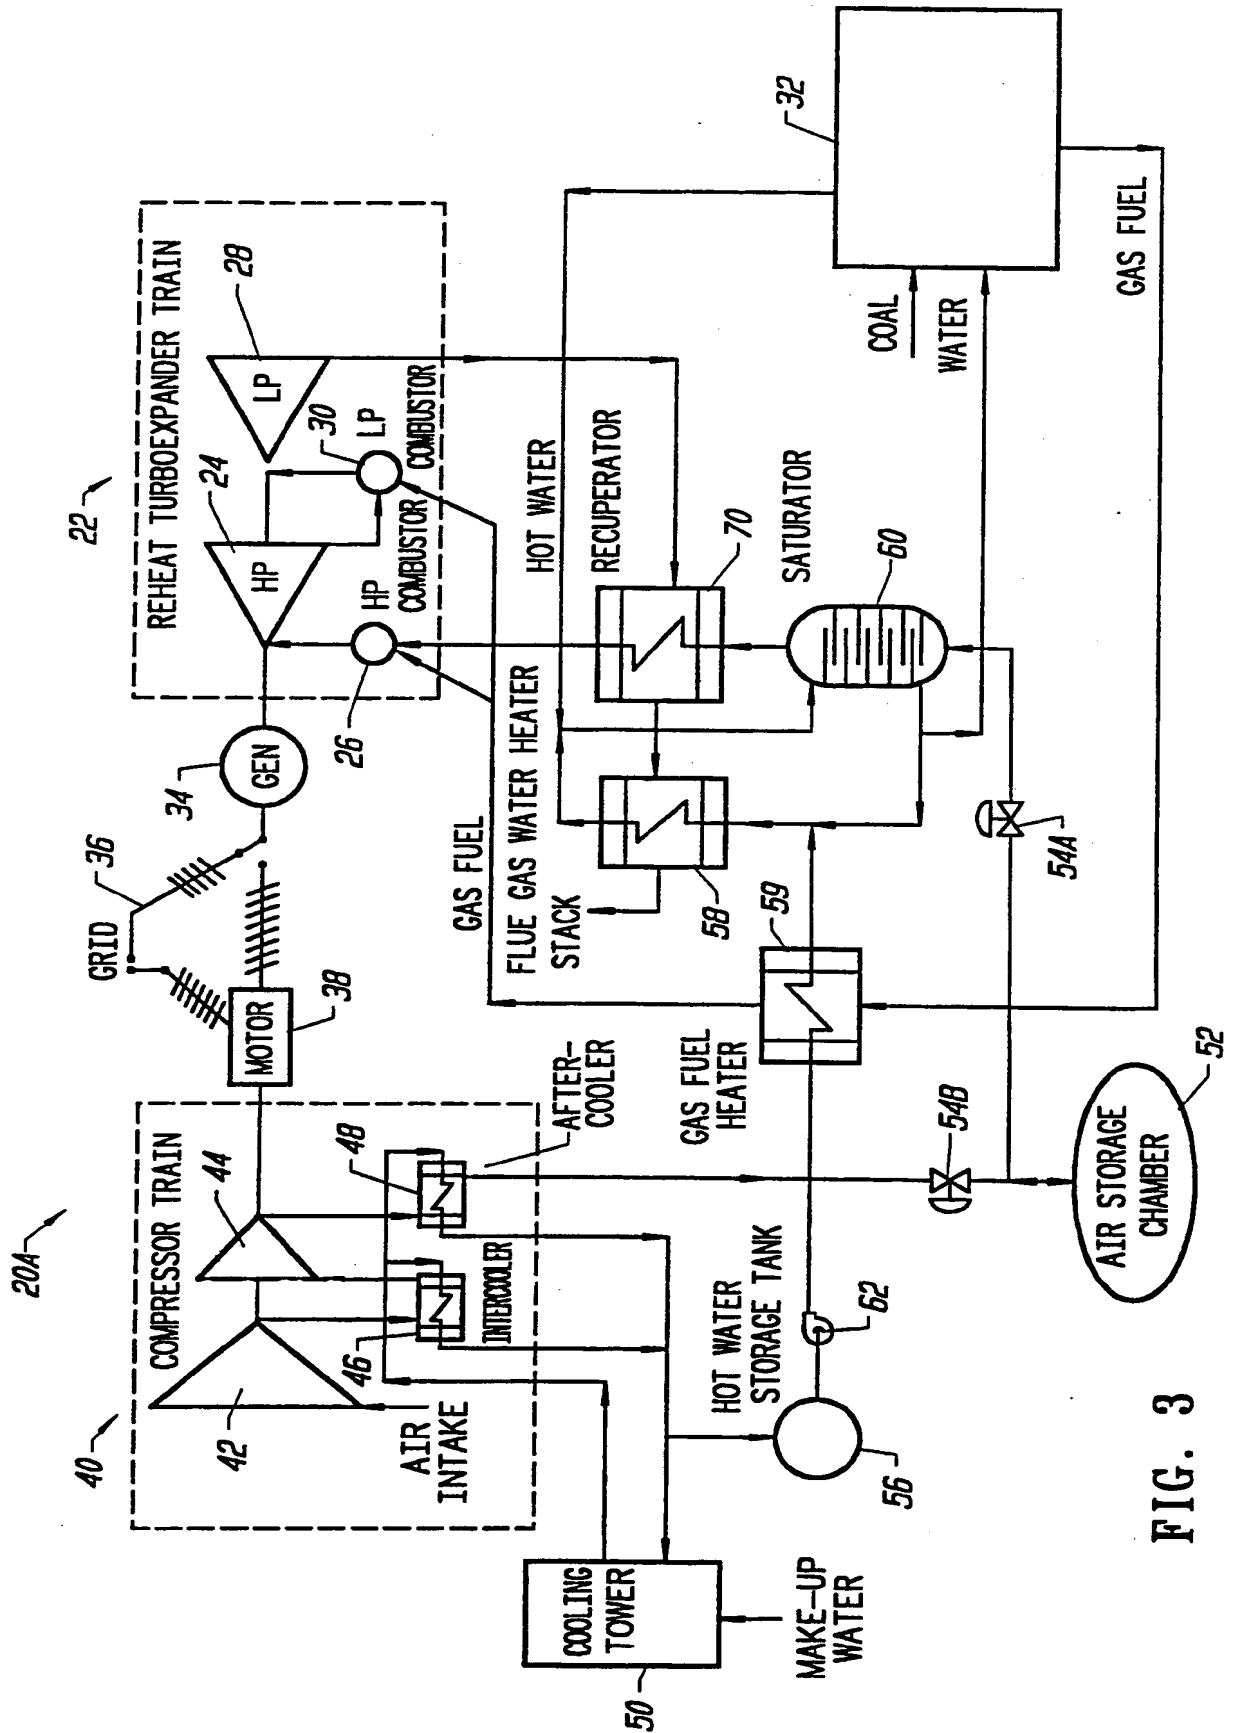


FIG. 3

A/5

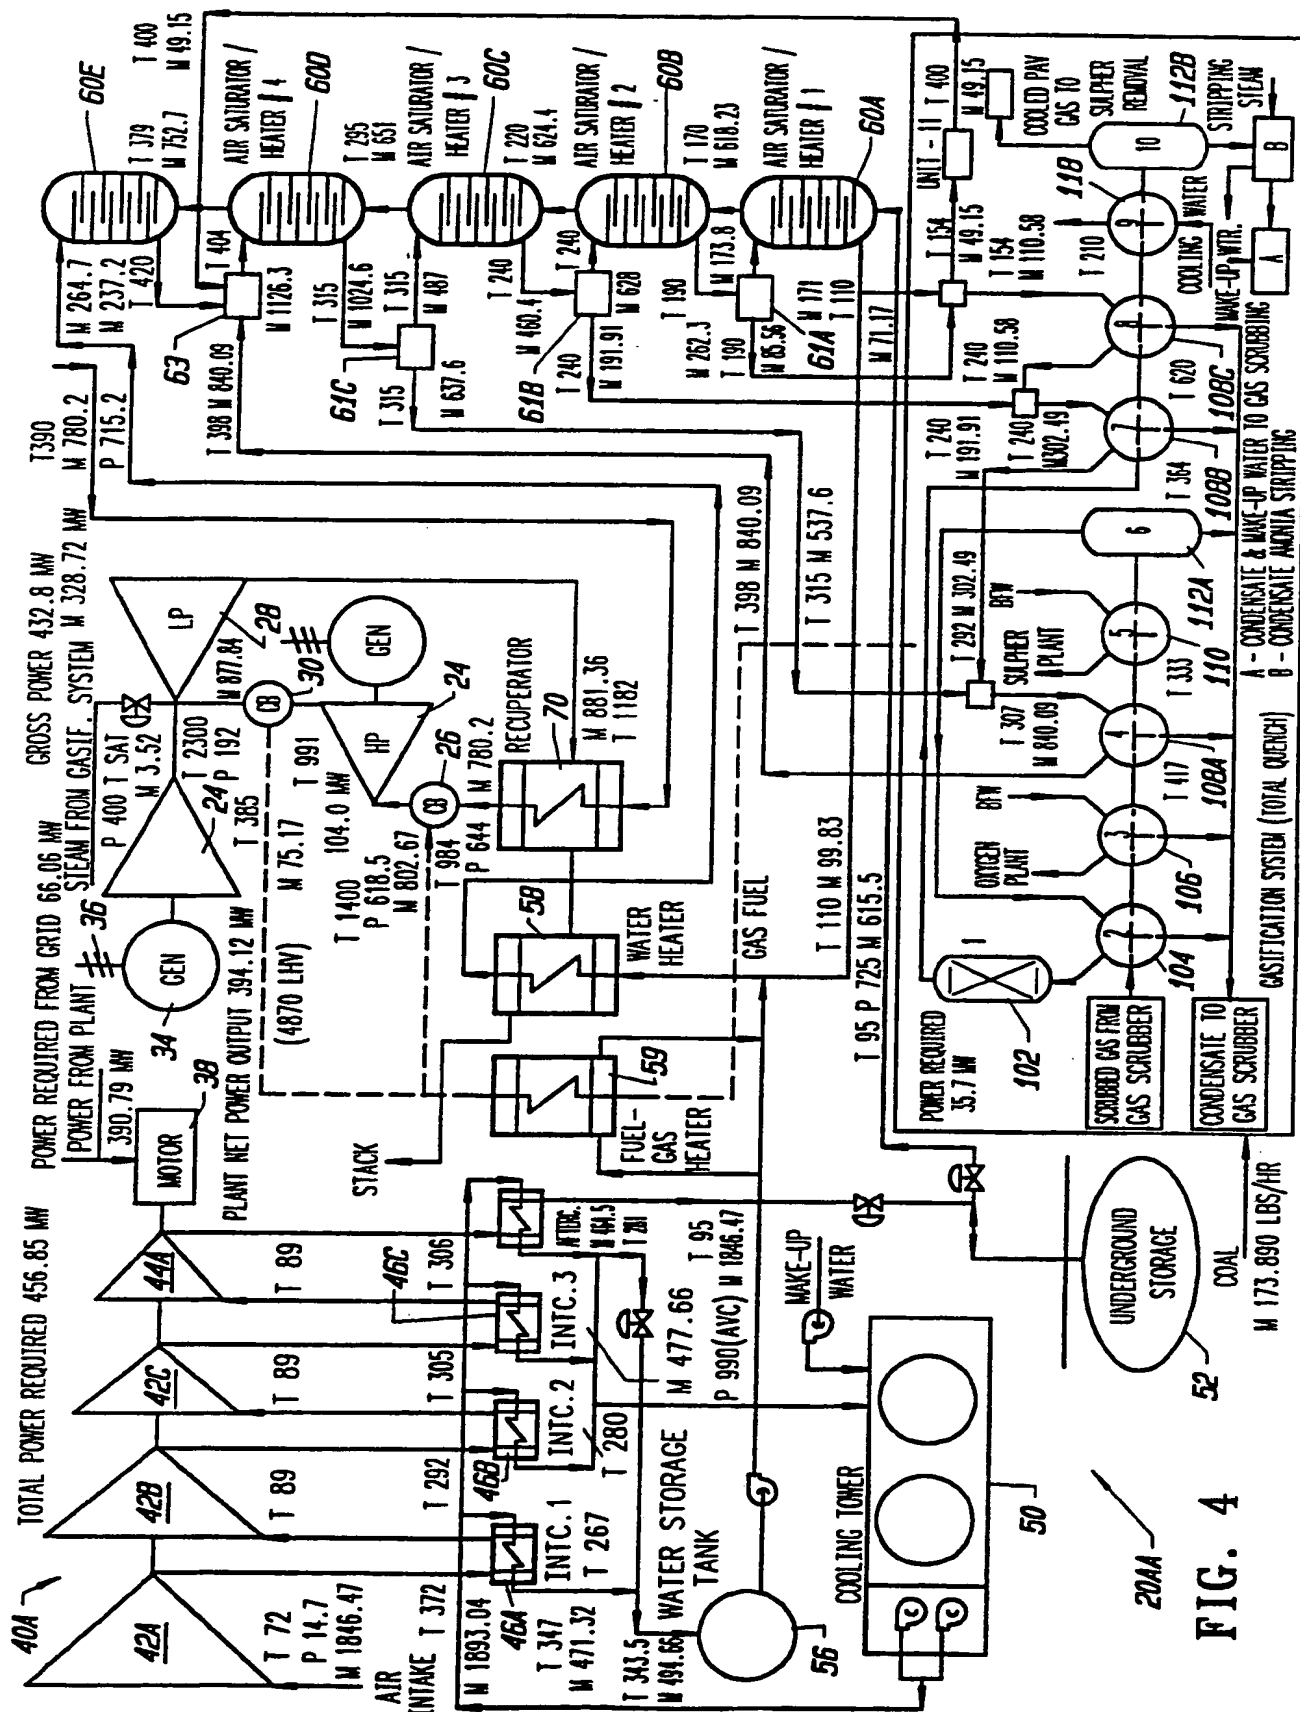


FIG. 4

SUBSTITUTE SHEET

5/5

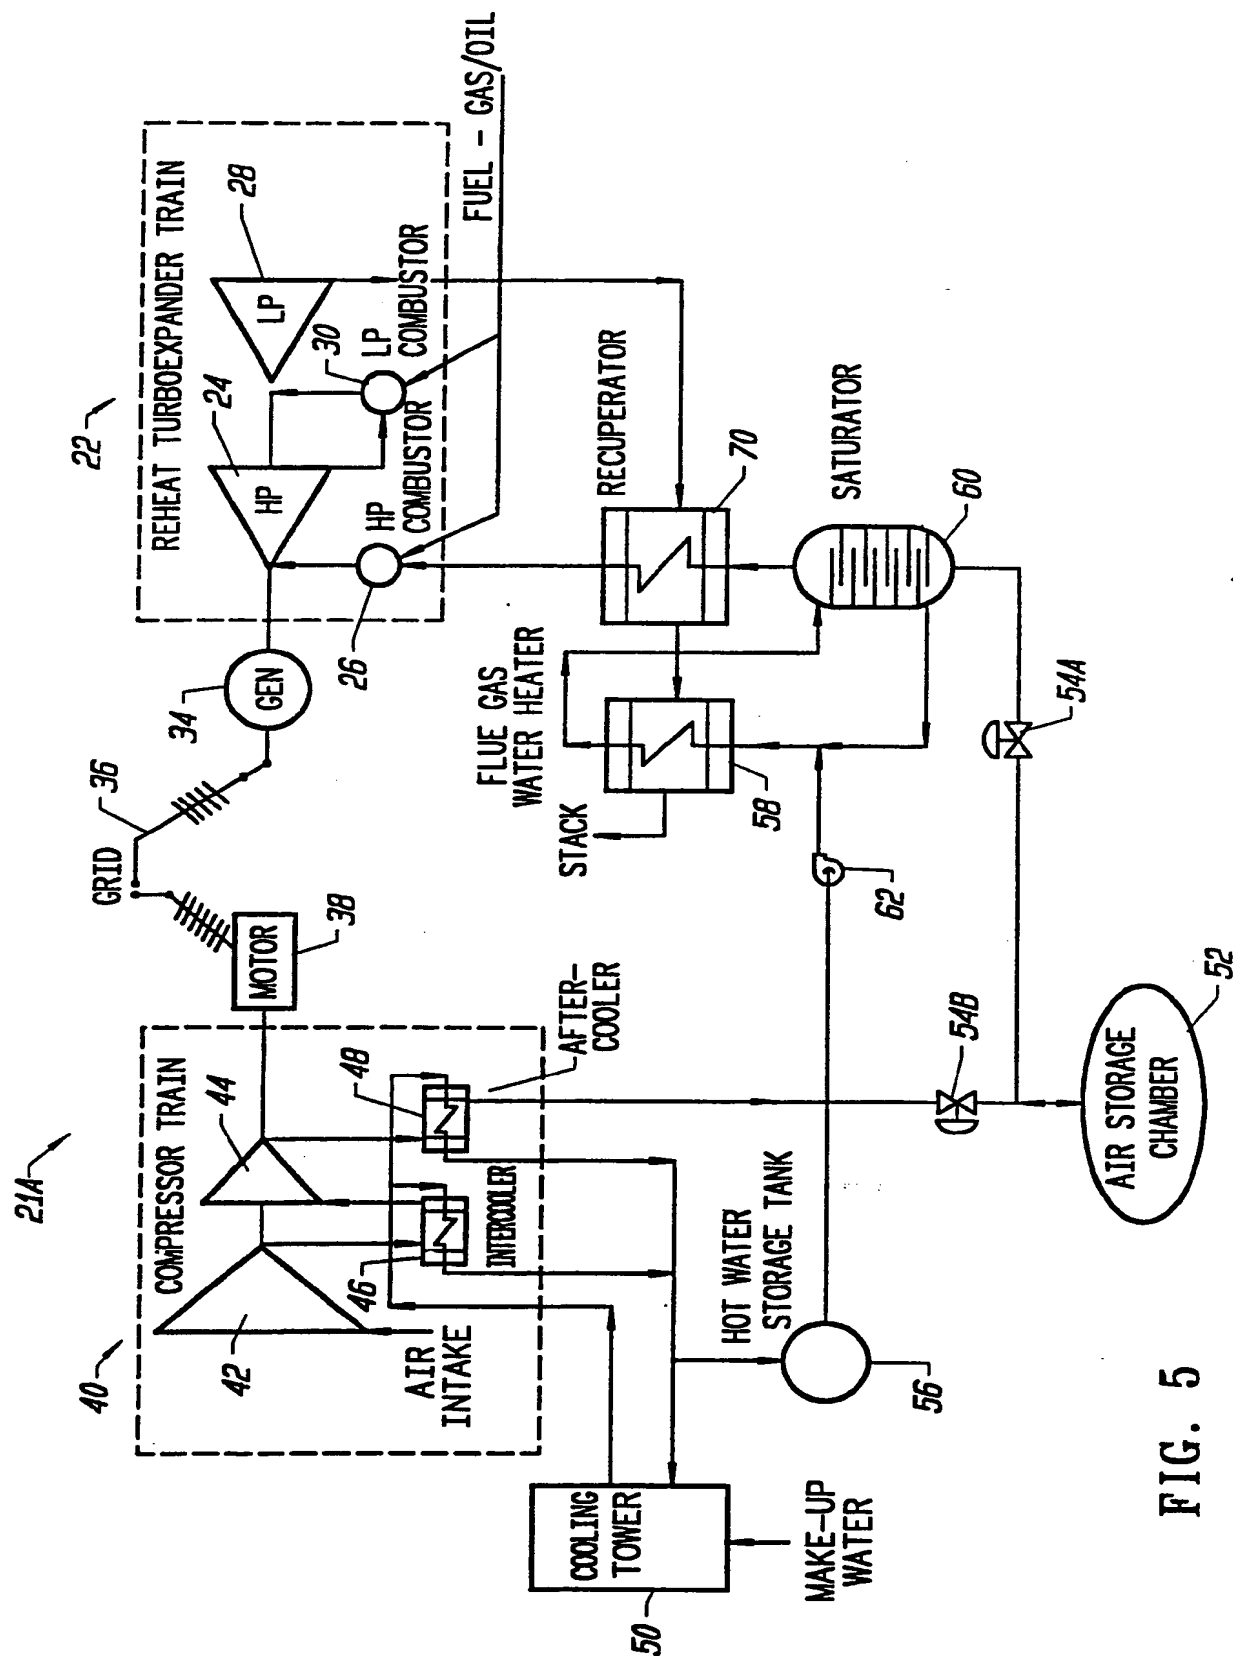


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US92/02758

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) :F02G 03/00

US CL :60/727, 39.05

According to International-Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 60/39.04, 39.17, 39.55, 39.59, 39.511, 728

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
<u>X</u> Y	FR, A 018,482 (MASCARELLO ET AL) 05 May 1973, Note figure 1.	1-3,5,6,14,15,27-39,32, <u>33</u> 13,23
Y	US, A, 4,872,307 (NAKHAMKIN) 10 October 1989, Note figure and abstract.	1-34
Y	US, A, 4,630,436 (FRUTSCHI) 23 December 1986, Note column 2, line 66 - column 3, line 2.	1-34
A	US, A, 4,829,763 (RAO) 16 May 1989, See entire document.	1-34
A	US, A, 4,537,023 (NAKAMURA ET AL) 27 August 1985, See entire document.	1-34

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Z" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

29 JUNE 1992

Date of mailing of the international search report

11 SEP 1992

Name and mailing address of the ISA/
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. NOT APPLICABLE

Authorized officer

MICHAEL KOCHAROV

Telephone No. (703) 308-2631

Form PCT/ISA/210 (second sheet)(July 1992)*

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)